


**KVM-6508-17 / 6516-17 8/16 port LCD KVM SWITCH**



The single-rail modular LCD KVM features an integrated 17" TFT LCD color display, one set of industrial keyboard and touchpad, and a 8/16-port KVM in 1U format. With the modular design, user only needs to take off few screws and any module can be easily detached/ re-attached again. Module replacement can be implemented with ease. Besides, the drawer design allows user to fold and hide the console when not in use.

## FEATURES

- \* Integrated KVM module with 17" LCD monitor、 keyboard/ touch pad module & a 8 or 16 port KVM switch within 1U chassis
- \* Support single rail for independent access to panel and keyboard tray
- \* Modular design for easy replacement and maintenance
- \* Comply with EIA RS-310C 19" rack mount standard
- \* Heavy-duty electroplate steel
- \* Support high resolution up to 1280 x 1024 @ 75Hz
- \* Support combo KVM module to connect servers via USB & PS/2 connection
- \* Installation setup can easily be done by a single person.

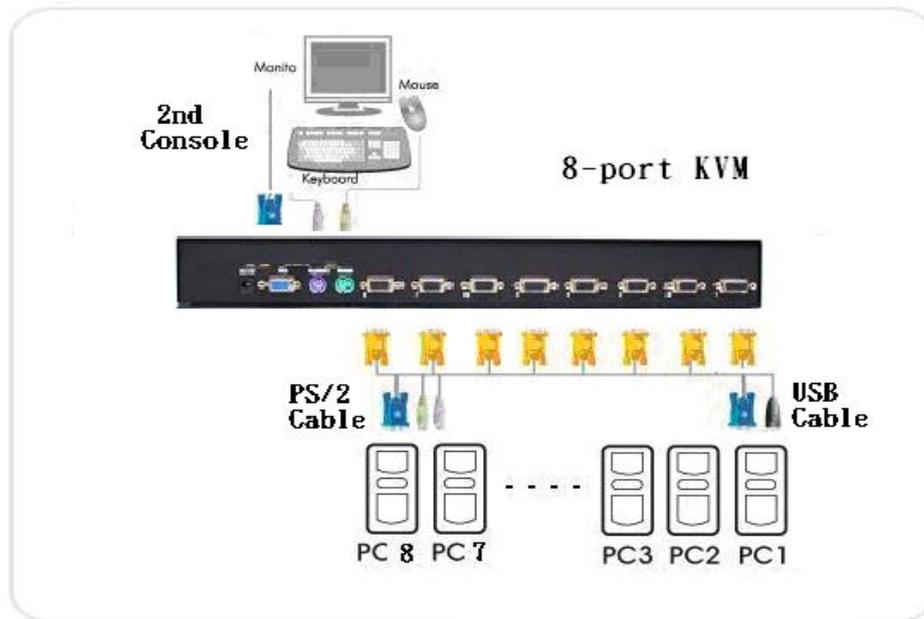

## SPECIFICATIONS

Model number	KVM-6508-17	KVM-6516-17
Resolution	1280x1024@85Hz	
Display Color	16M	
Contrast	450:1	
Luminance	300cd/m <sup>2</sup>	
Viewing Angle	H 80/80(160) 、 V 60/80(140)	
Pixel	0.297*0.297	
Console Port	HDDB 15pin ( shared with VGA,PS2 keyboard and Mouse )	
PC selection	Push Buttons *16 、 OSD (On Screen Display Manu) 、 Hot -Keys	
KVM Switch	8 port	16 port
Keyboard Emulation	PS/2	
Mouse Emulation	PS/2	
VGA Resolution	Max. 1280x1024 (Limited by TFT LCD monitor)	

Housing	Metal
Power in	DC 12V 4A (with one AC to DC power Adapter)
Operation Temperature	0~50°C
Storage Temperature	-20 ~ 60°C
Humidity	0~80%, Non-Condensing
Size	482*610*44mm (WLH) , 19" Rack Mount / 1U
Weight	18KGS ( w/o KVM Switch)
Safety	CE, FCC approved.