
SC-485 RS-232 to RS-485 Converter



RS-232 to RS-485 Converter, supports 2-way data transmission (RS-232 to RS-485 or RS-485 to RS-232) •

FEATURES

- DB9 female connector for RS232 to 2 wires terminal block for RS485.
- Two wire, differential signals, half duplex.
- Non power operation.
- Auto switching baud rate, speed up to 115,200 bps over a distance 1,200M.
- 32 units connected together in RS-485 multi drop operation.

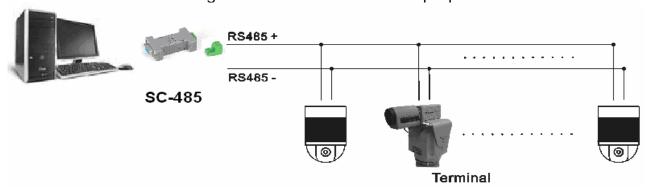

SPECIFICATIONS

SPECIFICATION	SC-485
RS-232 Port	1 x DB-9/F
RS-485 Port	2-pin terminal block
Baud Rate	115,200bps
Environment	Operating Temp: -10~45°C; Storage Temp: -30 to 70°C
Dimension	53*33*17 mm (WHD)
Transmission Distance	1,200 meters
Power Consumption	10mA (max.)